

Congoleum®

COMMERCIAL FLOORING SHEET • TILE



CONGOLEUM



COMMERCIAL



FLOR-EVER® PLUS

Flor-Ever Plus with antimicrobial product protection is the perfect flooring choice for both work and living spaces where the performance of a light commercial floor is required.


- Antimicrobial Protection... contains Silver, nature's own antimicrobial protection, encapsulated in a glass matrix to guard the floor against bacteria, mold and mildew.
- Designed to easily coordinate with both commercial and residential interiors.
- A durable wearlayer, fortified with aluminum oxide combined with a tough overall construction, provides superior performance and reduced maintenance.
- Styled and constructed for use in a variety of environments, Flor-Ever Plus is recommended for assisted and retirement living facilities, government housing, student housing, offices, schools, retail shops and main street applications.
- FloorScore certified product for indoor air quality performance.
- Available in 12' widths for reduced seams and installation costs.
- Meets Reference Specification: ASTM F 1303, Type I, Grade 1, Class A backing



METROPOLIS



51040 NEW WHITE



51041 CORNERSTONE BEIGE



51042 MONUMENT GRAY




51043 EARTHEN CLAY


UPTOWN




51061 SAND BAR




51062 OATMEAL



51063 SEAGRASS



51064 PORCELAIN



51066 SUEDE



51067 BRUSHED PEWTER



51068 MODERN MAUVE

SELECT OAK



51010 PURE OAK



51011 NATURAL OAK



51012 MEDIUM OAK



51013 DARK OAK

BUILDING BLOCKS



51030 COCONUT CREAM



51031 SANDBOX



51032 OYSTER SHELL

SLATE WALK



51050 SMOOTH IVORY



51052 NATURAL SLATE





ALTERNATIVES[®]

Alternatives, a standard priced commercial tile, is ideally suited for all commercial applications. Alternatives is long-wearing and designed to stand up to heavy traffic.

- Broad range of commercial colorations.
- Meets Reference Specification: ASTM F 1066, Class 2
- Designed for long wear in heavy traffic areas.
- Resists abrasions and cigarette burns.
- FloorScore certified product for indoor air quality performance.
- Tile size: 12" x 12"
- Alternatives Gauge: 1/8" • TT Series Gauge: 3/32"

Dark colored patterns are subject to scratch whitening. If used in field areas, more frequent maintenance may be required.



AL-00 DEEP PURPLE
AL-11 PEARL WHITE TT-11*
AL-25 CONFETTI BLACK



AL-01 PLUM
AL-13 HEATHERED STONE BLUE/COFFEE
AL-31 PEWTER SHADOW



AL-02 LILAC
AL-15 HEATHERED ROSE
AL-32 MEDIUM STONE GRAY



AL-37 PUTTY/CLAY/SIENNA
AL-44 COFFEE/WALNUT
AL-56 SOFT SHELL



AL-06 MULTI/DESERT
AL-18 EMERALD LACE
AL-33 IRON GRAY TT-33*



AL-40 WARM TAUPE
AL-46 MULTI/CORONADO
AL-59 CHERRY PEPPER



AL-10
AL-19 WHITE/COASTAL
AL-34 GREIGE/TAUPE



AL-41 MULTI/TOAST
AL-47 GOLDEN WHEAT
AL-60 ORANGE GLOW

*Also available in TT Series in 3/32" gauge




AL-21 EBONY
AL-35 HEATHERED BLUE/ROSE



AL-43 MUSHROOM TT-43*
AL-49 HEATHERED BLUE/MOCHA
AL-64 SANTA FE CLAY



ALTERNATIVES cont.

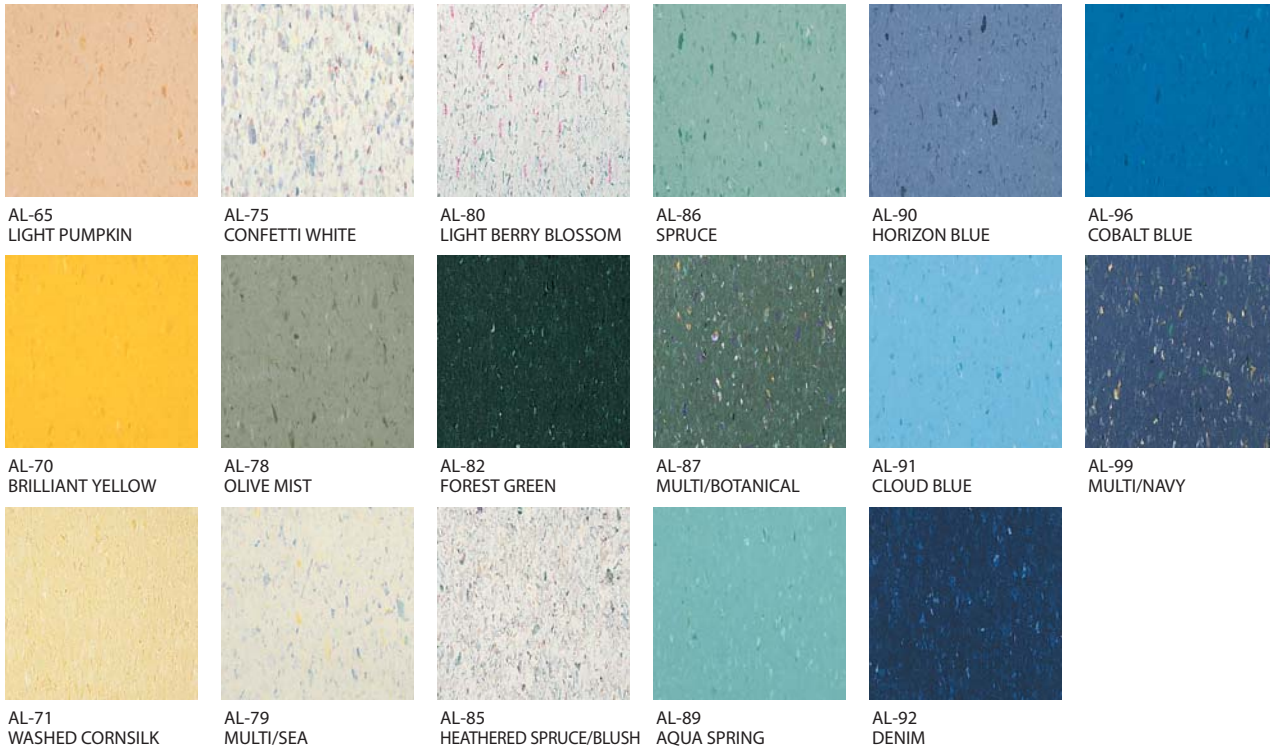

CHOICES®

Choices colorations meet the basic design and color requirements for today's commercial projects. Choices, a standard priced commercial floor tile, is long-wearing and designed to stand up to heavy traffic.

- Meets Reference Specification: ASTM F 1066, Class 2
- FloorScore certified product for indoor air quality performance.
- Designed for long wear in heavy traffic areas.
- Tile size: 12" x 12"
- Resists abrasions and cigarette burns.
- Choices Gauge: 1/8"
- TT Series Gauge: 3/32"




*Also available in TT Series in 3/32" gauge.


CX SERIES™

CX Series is the perfect commercial tile for budget installations that do not require material meeting the gauge requirements of ASTM specifications.

- Designed for long wear in heavy traffic areas.
- Resists abrasions and cigarette burns.
- FloorScore certified product for indoor air quality performance.
- Tile size: 12" x 12"
- Gauge: .100"

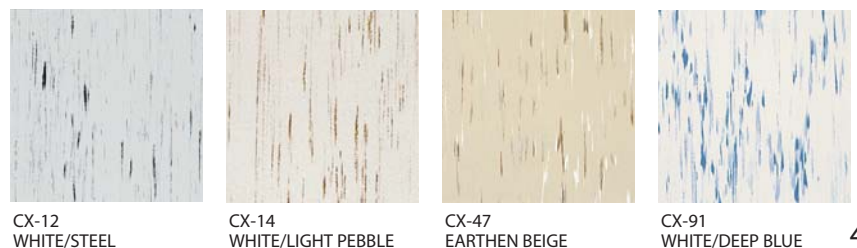

REFERENCE SPECIFICATIONS

| | SHEET | | TILE | | | |
|--|--|--|--------------------------------------|------------------|------------------|-----------------|
| | FLOR-EVER PLUS | | CHOICES | ALTERNATIVES | TT SERIES | CX SERIES |
| Approx.Installed Cost Per Square Foot | \$3.00 - \$3.50 | | \$1.50 - \$2.00 | | \$1.35 - \$2.00 | \$1.35 - \$2.00 |
| Colors Available | 20 | | 6 | 46 | 7 | 4 |
| Width | 12 ft. | | 12" x 12" (305mm x 305mm) | | | |
| Length | Up to 120' | | — | | | |
| Gauge – Overall | .080" nominal (2.03mm) | | 1/8" (3.2mm) | 3/32" (2.4mm) | .100" (2.5mm) | |
| Vinyl Composition Wearlayer | — | | — | — | — | |
| Vinyl Wearlayer | .020"(.51mm) | | — | — | — | |
| Packing | — | | 45 pcs. (45 sq. ft.; 4.2 sq. meters) | | | |
| REFERENCE SPECIFICATIONS • ASTM F 1303 | Type I, Grade 1 Class A backing | | — | | | |
| • ASTM F 1066 | — | | Class 2 | | | Class 2*** |
| FIRE TEST DATA • ASTM E 648; NFPA-253; Critical Radiant Flux - 0.45 watts/cm ² or greater | | | YES | | | |
| • ASTM E 662; NFPA-258; NBS Smoke Density - 450 or less | | | YES | | | |
| • D.O.T. Motor Vehicle Safety Standard 302 | YES | | — | | | |
| FloorScore Certified for Indoor Air Quality Performance  | | | YES* | | | |
| Static Load Limit | 175 psi | | 250 psi | | | |
| HUD/FHA Minimum Property Standards | | | YES | | | YES*** |
| Recommended Subfloor | Suspended wood, concrete, all grade levels | | | | | |
| Installation Method | Full Spread | | | | | |
| Recommended Congoleum Adhesive | 3044 | | AD42 | | | |
| Seam Sealer | SU80 or SU92 Seam Sealer | | — | | | |
| Warranty | Five-Year Commercial Limited Warranty | | | | | |
| Durability | Excellent | | | | | |
| Ease of Maintenance | Excellent | | | | | |

* FloorScore certified hard surface flooring products are an alternative compliance to LEED credit EQ4.3 Low-Emitting Materials: Flooring Systems.

** Modified ASTM F 970

***When .100" gauge is specified.

COMMERCIAL FLOORING RECOMMENDATIONS

| RECOMMENDED APPLICATIONS | SHEET | TILE | RECOMMENDED APPLICATIONS | SHEET | TILE |
|--------------------------------|----------------|--|--|----------------|--|
| | FLOR-EVER PLUS | ALTERNATIVES CHOICES CX SERIES* TT SERIES* | | FLOR-EVER PLUS | ALTERNATIVES CHOICES CX SERIES* TT SERIES* |
| Health Care/Hospitals | | | Retail cont. | | |
| Cafeteria/Dining Areas | ● | ■ 2 | Sales Floor | ▲ | ■ |
| Critical Intensive Care | ● | ▲ | Specialty Shops | ▲ | ■ |
| Corridors | ● | ▲ | Supermarket | ● | ■ 5 |
| Dental Offices | ■ 4 | ■ | Light Industrial | | |
| Dialysis | ■ 4 | ■ | Clean Room | ■ 3 | ● |
| Emergency Room Areas | ● | ▲ 3 | Production Labs | ■ 3,4,7 | ■ 3 |
| Exam/Procedure Rooms | ▲ 3,4 | ▲ 3 | Research Labs | ■ 3,4,7 | ■ 3 |
| Laboratories | ▲ 3,4,7 | ■ 3,7 | Small Parts Assembly | ■ 3,4 | ■ 3 |
| Nurses Station | ● | ■ | Sterile Packaging | ▲ 3 | ● |
| Patient Rooms | ■ | ■ | Hospitality | | |
| Pharmacy | ▲ | ■ | Corridors | ● | ■ 5 |
| Physician Offices | ■ | ■ | Dining Rooms/ Restaurants | ▲ 2,5 | ■ 2,5 |
| Physical Therapy Areas | ■ 5 | ■ 5 | Elevators | ● | ■ |
| Ramps | ● | ● | Guest Bathrooms | ■ | ■ |
| Staff Lounges | ▲ | ■ | Guest Rooms | ■ | ■ |
| Utility/Storage Areas | ■ | ■ | Lounges | ▲ | ■ |
| Veterinarian | ■ 4 | ■ | Storage Areas | ■ | ■ |
| Waiting Rooms | ● | ■ | Vending Areas | ■ 5 | ■ 5 |
| Educational/Institution | | | Vestibule/Entryway | ● | ▲ 5,6 |
| Auditorium | ● | ■ | Assisted Living/ Military Housing | | |
| Bathrooms | ● | ■ | Activity Rooms/ Common Areas | ■ | ■ |
| Cafeteria/Dining Areas | ● | ■ 2 | Beauty Salon/ Barbershop | ■ 4,7 | ■ 7 |
| Classrooms | ● | ■ | Corridors | ▲ | ■ |
| Commercial Kitchen | ● | ● | Daycare Areas | ■ | ■ |
| Corridors | ● | ■ | Dining Areas | ■ 2 | ■ 2 |
| Dormitory Rooms | ■ | ■ | Physician/Dental Offices | ■ 4 | ■ |
| Entryway | ● | ▲ 5 | Residence Bathrooms | ■ | ■ |
| Food Service Areas | ● | ▲ 2 | Residence Kitchens | ■ 2 | ■ 2 |
| Gymnasium | ● | ■ | Residential Rooms/ Barracks | ■ | ■ |
| Laboratories | ● | ■ 7 | Residential Contract | | |
| Library | ● | ■ | Kitchens/Baths | ■ | ■ |
| Lobby | ● | ■ | Low-Income Housing | ■ | ■ |
| Locker Room (No Spikes) | ● | ▲ 5 | Multi-Unit; Residential Housing | ■ | ■ |
| Utility/Storage Area | ■ | ■ | Retirement Communities | ■ | ■ |
| Office | | | Other | | |
| Bathrooms | ■ | ■ | Ambulance | ■ 4 | ● |
| Cafeteria/Dining Areas | ▲ 2 | ■ 2 | Museums/Cultural Centers | ● | ■ |
| Corridors | ■ 1 | ■ | Recreational Vehicles | ■ | ● |
| Elevators | ● | ■ | Ships | ▲ | ▲ |
| Lobby | ■ | ■ | | | |
| Office Conference Rooms | ■ | ■ | | | |
| Ramps | ● | ● | | | |
| Utility/Storage Rooms | ■ | ■ | | | |
| Vestibule/Entryway | ● | ▲ 5,6 | | | |
| Retail | | | | | |
| Beauty Salon/ Barbershop | ■ 4,7 | ■ 7 | | | |
| Checkout Areas | ● | ■ | | | |
| Food Service Areas | ● | ▲ 2 | | | |

Legend: ■ Highly Recommended ▲ Recommended ● Not Recommended

Notes:

- 1) 12' widths provide virtually seamless installation.
- 2) Not recommended for commercial kitchens or food processing areas.
- 3) Only in areas not requiring conductive or static dissipative flooring.
- 4) Excellent stain and chemical resistance.
- 5) Slip resistant polish and/or mats recommended in wet areas.
- 6) Provided local and federal recommendations are met.
- 7) Some solutions contain stainants that may permanently damage flooring if not cleaned up immediately. Asphalt driveways, particularly those recently installed or resealed with coal tar, can cause permanent staining in prominent traffic areas. Regular maintenance and floor mats placed at entryways will reduce or eliminate coal tar stains. Congoleum recommends the use of latex emulsion asphalt sealers where possible.

* CX Series and TT Series do not comply with ASTM specifications for gauge requirements.

Not recommended for:

- Automotive maintenance areas
- Automotive showroom unless flooring is protected from oil spills and contact with rubber tires
- Commercial kitchens
- Food processing areas
- Walk-in freezers
- Paint, dye and ink manufacturing facilities
- Outdoor areas exposed to elements
- Ramps
- Walls/Ceilings

Congoleum[®]

CORPORATION

P.O. Box 3127
Mercerville, NJ 08619
609-584-3000
www.congoleum.com
Email: commercial@congoleum.com



sample express
1-800-934-3567, EXTENSION 180

If you are in a rush for individual samples, call SAMPLE EXPRESS toll-free and we will ship complimentary samples of Congoleum Commercial Flooring to you within 24 hours of your request. It's that easy!



AS CERTIFIED BY  The Flooring Products Certification Program For Indoor Air Quality.

COMPLETE DETAILS ARE AVAILABLE AT WWW.RFCI.COM

Due to the difference between the digital image and the pigments used in the manufacture of Congoleum floors, we cannot guarantee exact color reproduction. Ultimate selection should be made from actual samples.

ALTERNATIVES, BAC STOP, CHOICES, CONGOLEUM and WHITE SHIELD are registered trademarks of Congoleum Corporation. CX SERIES, FLOR-EVER PLUS, SAMPLE EXPRESS and TT SERIES are trademarks of Congoleum Corporation. FloorScore and the FloorScore logo are certification marks of the Resilient Floor Covering Institute. The SCS name, logo and certification emblem are trademarks, service marks and/or certification marks of Scientific Certification Systems, Inc ("SCS").